



REVISION HISTORY

<u>Revision</u>	<u>Description</u>	<u>Issue Date</u>
Rev. 1.0	Initial Issue	Jul.25.2004
Rev. 2.0	Revised V _{CC} Range 4.5~5.5V => 2.7~5.5V	May.3.2005
Rev. 2.1	Revised I _{SB1}	May.13.2005
Rev. 2.2	Adding PKG type : skinny PDIP	Aug.29.2005
Rev. 2.3	Revised V _{IH} (min)=2.4V, V _{IL} (max)=0.6V	Feb.24.2006
Rev. 2.4	Revised V _{IH} (min)=2.4V, V _{IL} (max)=0.6V (VCC=2.7~3.6V) V _{IH} (min)=2.4V, V _{IL} (max)=0.8V (VCC=4.5~5.5V)	Jul.31.2006
Rev. 2.5	Revised <u>PACKAGE OUTLINE DIMENSION</u> of sTSOP	Mar.26.2008
Rev. 2.6	Added SL grade Added I _{SB1} /I _{DR} values when T _A = 25°C and T _A = 40°C Revised <u>FEATURES & ORDERING INFORMATION</u> <u>Lead free and green package available to Green package available</u> Added packing type in <u>ORDERING INFORMATION</u> Revised I _{SB1} (MAX) Revised V _{TERM} to V _{T1} and V _{T2} Revised <u>Test Condition</u> of I _{SB1} /I _{DR} in <u>DC ELECTRICAL & DATA RETENTION CHARACTERISTICS</u> Deleted T _{SOLDER} in <u>ABSOLUTE MAXIMUM RATINGS</u>	Mar.30.2009
Rev. 2.7	Revised <u>PACKAGE OUTLINE DIMENSION</u> in page 10	May.7.2010
Rev. 2.8	Revised <u>ORDERING INFORMATION</u> in page 12 Revised <u>PACKAGE OUTLINE DIMENSION</u> in page 9	Aug.25.2010
Rev. 2.9	Deleted <u>WRITE CYCLE</u> Notes : 1. WE#, CE# must be high or CE2 must be low during all address transitions in page 6	Jun.28.2016
Rev. 2.10	Corrected <u>ORDERING INFORMATION</u> Typo in page 13	Jul.21.2016
Rev. 2.11	Revised <u>PACKAGE OUTLINE DIMENSION</u> in page 8	Jan.08.2025
Rev. 2.12	Deleted -35ns part Issued EOL process of parts of SOP/sTSOP	Dec.30.2025
Rev. 2.13	Revised <u>ORDERING INFORMATION</u> in Page 11	Jun.11.2026

FEATURES

- Fast access time : 55/70ns
- Low power consumption:
Operating current : 15/10mA (TYP.)
Standby current : 1 μ A (TYP.)
- Single 2.7~5.5V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data retention voltage : 1.5V (MIN.)
- **Green package available**
- Package : 28-pin 600 mil PDIP
28-pin 300 mil Skinny PDIP

GENERAL DESCRIPTION

The LY6264 is a 65,536-bit low power CMOS static random access memory organized as 8,192 words by 8 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.


The LY6264 is well designed for very low power system applications, and particularly well suited for battery back-up nonvolatile memory application.

The LY6264 operates from a single power supply of 2.7~5.5V and all inputs and outputs are fully TTL compatible

PRODUCT FAMILY

Product Family	Operating Temperature	V _{CC} Range	Speed	Power Dissipation	
				Standby(I _{SB1} , TYP.)	Operating(I _{CC} , TYP.)
LY6264	0 ~ 70°C	2.7 ~ 5.5V	55/70ns	1 μ A	15/10mA
LY6264(E)	-20 ~ 80°C	2.7 ~ 5.5V	55/70ns	1 μ A	15/10mA
LY6264(I)	-40 ~ 85°C	2.7 ~ 5.5V	55/70ns	1 μ A	15/10mA


FUNCTIONAL BLOCK DIAGRAM

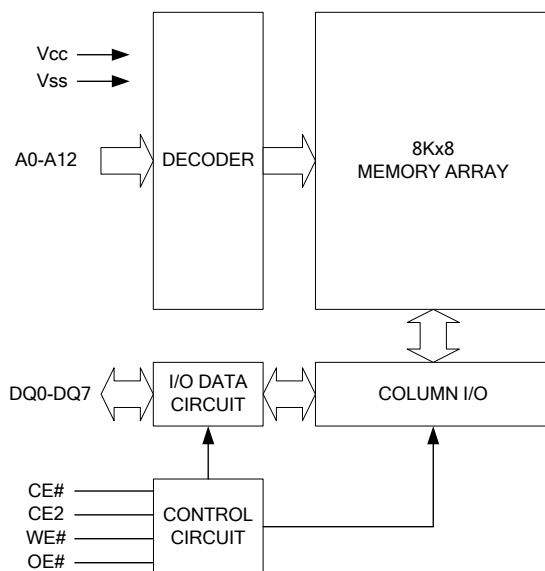

PIN DESCRIPTION

SYMBOL	DESCRIPTION
A0 - A12	Address Inputs
DQ0 - DQ7	Data Inputs/Outputs
CE#, CE2	Chip Enable Inputs
WE#	Write Enable Input
OE#	Output Enable Input
V _{CC}	Power Supply
V _{SS}	Ground
NC	No Connection

PIN CONFIGURATION

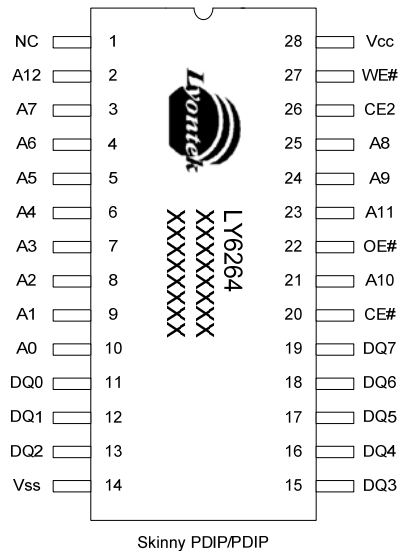

ABSOLUTE MAXIMUN RATINGS*

PARAMETER	SYMBOL	RATING	UNIT
Voltage on V_{CC} relative to V_{SS}	V_{T1}	-0.5 to 6.5	V
Voltage on any other pin relative to V_{SS}	V_{T2}	-0.5 to $V_{CC}+0.5$	V
Operating Temperature	T_A	0 to 70(C grade)	°C
		-20 to 80(E grade)	
		-40 to 85(I grade)	
Storage Temperature	T_{STG}	-65 to 150	°C
Power Dissipation	P_D	1	W
DC Output Current	I_{OUT}	50	mA

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

TRUTH TABLE

MODE	CE#	CE2	OE#	WE#	I/O OPERATION	SUPPLY CURRENT
Standby	H	X	X	X	High-Z	I_{SB}, I_{SB1}
	X	L	X	X	High-Z	I_{SB}, I_{SB1}
Output Disable	L	H	H	H	High-Z	I_{CC}, I_{CC1}
Read	L	H	L	H	DOUT	I_{CC}, I_{CC1}
Write	L	H	X	L	DIN	I_{CC}, I_{CC1}

Note: H = V_{IH} , L = V_{IL} , X = Don't care.

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP. ^{*4}	MAX.	UNIT
Supply Voltage	V_{CC}		2.7	3.3	5.5	V
Input High Voltage	V_{IH}^{*1}		2.4	-	$V_{CC}+0.5$	V
Input Low Voltage	V_{IL}^{*2}	$V_{CC}=2.7\sim3.6V$	-0.5	-	0.6	V
		$V_{CC}=4.5\sim5.5V$	-0.5	-	0.8	V
Input Leakage Current	I_{LI}	$V_{CC} \geq V_{IN} \geq V_{SS}$	-1	-	1	μA
Output Leakage Current	I_{LO}	$V_{CC} \geq V_{OUT} \geq V_{SS}$, Output Disabled	-1	-	1	μA
Output High Voltage	V_{OH}	$I_{OH} = -1mA$	2.4	3.0	-	V
Output Low Voltage	V_{OL}	$I_{OL} = 2mA$	-	-	0.4	V
Average Operating Power supply Current	I_{CC}	Cycle time = Min. $CE\# = V_{IL}$ and $CE2 = V_{IH}$, $I_{I/O} = 0mA$ Other pins at V_{IL} or V_{IH}	-55	15	45	mA
			-70	10	40	mA
	I_{CC1}	Cycle time = $1\mu s$ $CE\# \leq 0.2V$ and $CE2 \geq V_{CC}-0.2V$, $I_{I/O} = 0mA$ other pins at 0.2V or $V_{CC}-0.2V$	-	3	10	mA
Standby Power Supply Current	I_{SB}	$CE\# = V_{IH}$ or $CE2 = V_{IL}$ Other pins at V_{IL} or V_{IH}	-	1	3	mA
	I_{SB1}	$CE\# \geq V_{CC}-0.2V$ or $CE2 \leq 0.2V$ Others at 0.2V or $V_{CC} - 0.2V$	LL	1	20	μA
			LLE/LLI	1	30	μA
			SL ^{*5}	1	3	μA
			SLE ^{*5}	1.5	4	μA
			SLI ^{*5}	1	20	μA
			SL	1	10	μA
			SLE/SLI	1	20	μA

Notes:

- $V_{IH}(\max) = V_{CC} + 3.0V$ for pulse width less than 10ns.
- $V_{IL}(\min) = V_{SS} - 3.0V$ for pulse width less than 10ns.
- Over/Undershoot specifications are characterized, not 100% tested.
- Typical values are included for reference only and are not guaranteed or tested.
Typical values are measured at $V_{CC} = V_{CC}(\text{TYP.})$ and $T_A = 25^\circ C$
- This parameter is measured at $V_{CC} = 3.0V$

CAPACITANCE ($T_A = 25^\circ\text{C}$, $f = 1.0\text{MHz}$)

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	C_{IN}	-	6	pF
Input/Output Capacitance	$C_{I/O}$	-	8	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

Input Pulse Levels	0.2V to $V_{CC} - 0.2V$
Input Rise and Fall Times	3ns
Input and Output Timing Reference Levels	1.5V
Output Load	$C_L = 50\text{pF} + 1\text{TTL}$, $I_{OH}/I_{OL} = -1\text{mA}/2\text{mA}$

AC ELECTRICAL CHARACTERISTICS
(1) READ CYCLE

PARAMETER	SYM.	LY6264-55		LY6264-70		UNIT
		MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	t_{RC}	55	-	70	-	ns
Address Access Time	t_{AA}	-	55	-	70	ns
Chip Enable Access Time	t_{ACE}	-	55	-	70	ns
Output Enable Access Time	t_{OE}	-	30	-	35	ns
Chip Enable to Output in Low-Z	t_{CLZ}^*	10	-	10	-	ns
Output Enable to Output in Low-Z	t_{OLZ}^*	5	-	5	-	ns
Chip Disable to Output in High-Z	t_{CHZ}^*	-	20	-	25	ns
Output Disable to Output in High-Z	t_{OHZ}^*	-	20	-	25	ns
Output Hold from Address Change	t_{OH}	10	-	10	-	ns


(2) WRITE CYCLE

PARAMETER	SYM.	LY6264-55		LY6264-70		UNIT
		MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	t_{WC}	55	-	70	-	ns
Address Valid to End of Write	t_{AW}	50	-	60	-	ns
Chip Enable to End of Write	t_{CW}	50	-	60	-	ns
Address Set-up Time	t_{AS}	0	-	0	-	ns
Write Pulse Width	t_{WP}	45	-	55	-	ns
Write Recovery Time	t_{WR}	0	-	0	-	ns
Data to Write Time Overlap	t_{DW}	25	-	30	-	ns
Data Hold from End of Write Time	t_{DH}	0	-	0	-	ns
Output Active from End of Write	t_{OW}^*	5	-	5	-	ns
Write to Output in High-Z	t_{WHZ}^*	-	20	-	25	ns


*These parameters are guaranteed by device characterization, but not production tested.

TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2)


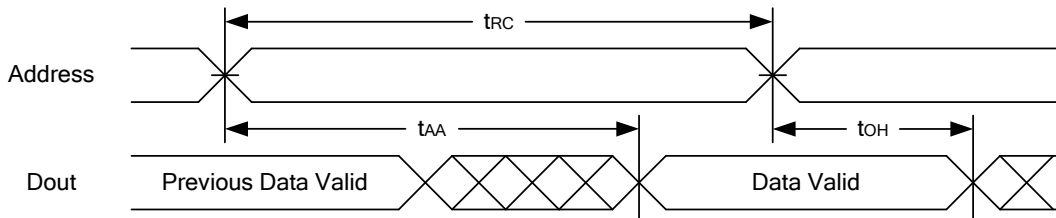


READ CYCLE 2 (CE# and CE2 and OE# Controlled) (1,3,4,5)

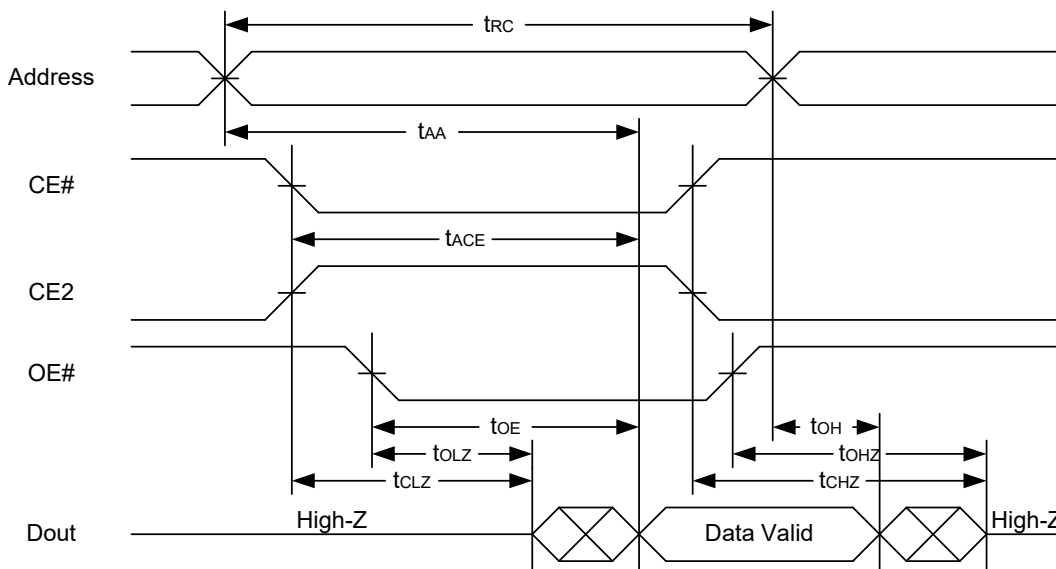

Notes :

1. WE# is high for read cycle.
2. Device is continuously selected OE# = low, CE# = low, CE2 = high.
3. Address must be valid prior to or coincident with CE# = low, CE2 = high; otherwise t_{AA} is the limiting parameter.
4. t_{CLZ} , t_{OLZ} , t_{CHZ} and t_{OHZ} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.
5. At any given temperature and voltage condition, t_{CHZ} is less than t_{CLZ} , t_{OHZ} is less than t_{OLZ} .

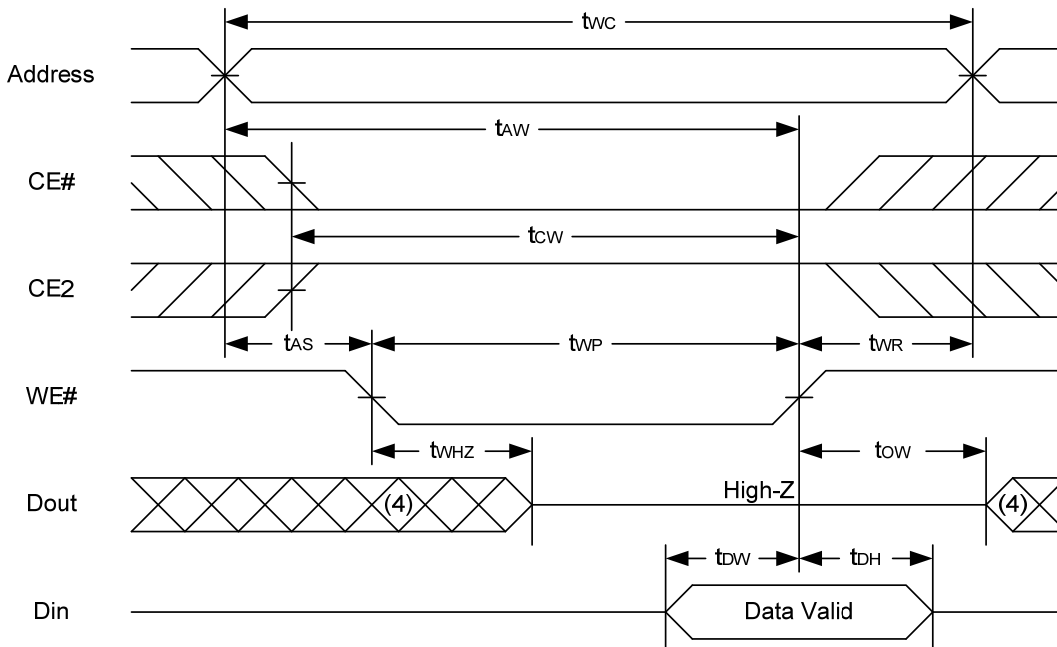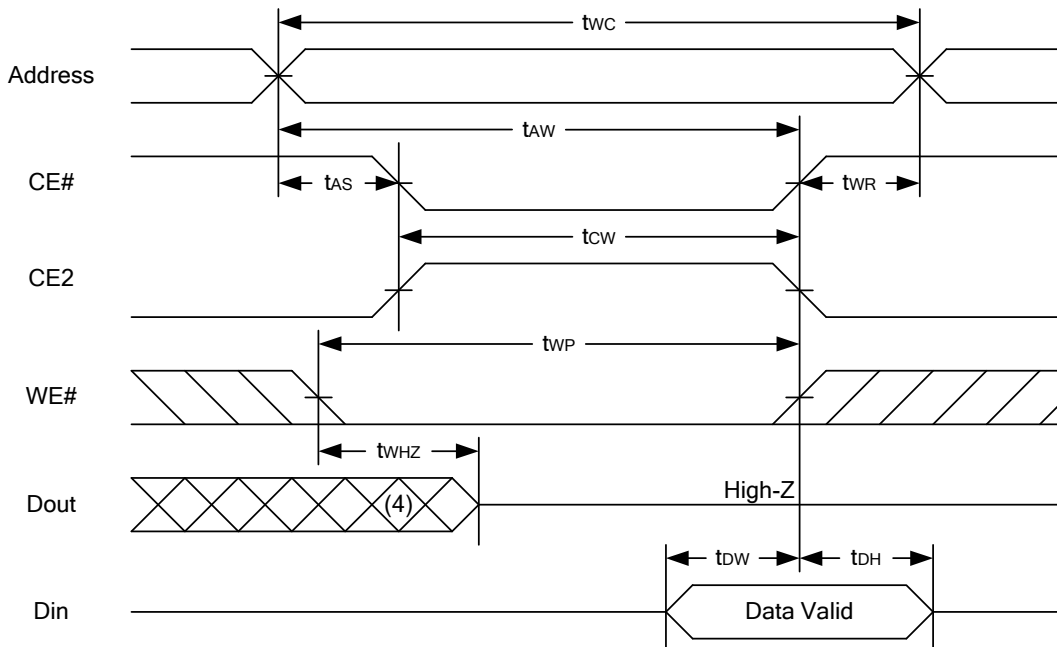WRITE CYCLE 1 (WE# Controlled) (1,2,4,5)

WRITE CYCLE 2 (CE# and CE2 Controlled) (1,4,5)

Notes :

1. A write occurs during the overlap of a low CE#, high CE2, low WE#.
2. During a WE# controlled write cycle with OE# low, t_{WP} must be greater than $t_{WHZ} + t_{OW}$ to allow the drivers to turn off and data to be placed on the bus.
3. During this period, I/O pins are in the output state, and input signals must not be applied.
4. If the CE# low transition and CE2 high transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
5. t_{OW} and t_{WHZ} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.


DATA RETENTION CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION			MIN.	TYP.	MAX.	UNIT
V _{CC} for Data Retention	V _{DR}	CE# ≥ V _{CC} - 0.2V or CE2 ≤ 0.2V			1.5	-	5.5	V
Data Retention Current	I _{DR}	V _{CC} = 1.5V CE# ≥ V _{CC} - 0.2V or CE2 ≤ 0.2V Others at 0.2V or V _{CC} -0.2V	LL/LLE/LLI		-	0.5	20	μA
			SL	25°C	-	0.5	2	μA
			SLE	40°C	-	1	3	μA
			SLI		-	0.5	8	μA
			SL		-	0.5	8	μA
			SLE/SLI		-	0.5	15	μA
Chip Disable to Data Retention Time	t _{CDR}	See Data Retention Waveforms (below)			0	-	-	ns
Recovery Time	t _R				t _{RC} *	-	-	ns


t_{RC}* = Read Cycle Time

DATA RETENTION WAVEFORM

Low V_{CC} Data Retention Waveform (1) (CE# controlled)

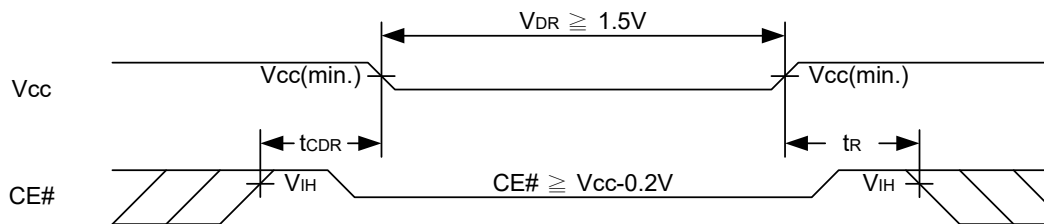


Low V_{CC} Data Retention Waveform (2) (CE2 controlled)

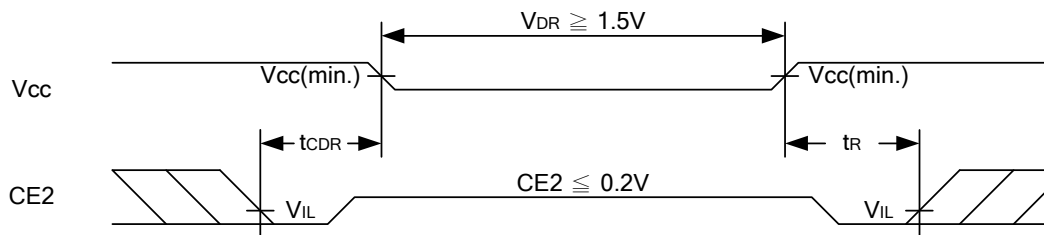

PACKAGE OUTLINE DIMENSION


28 pin 600 mil PDIP Package Outline Dimension

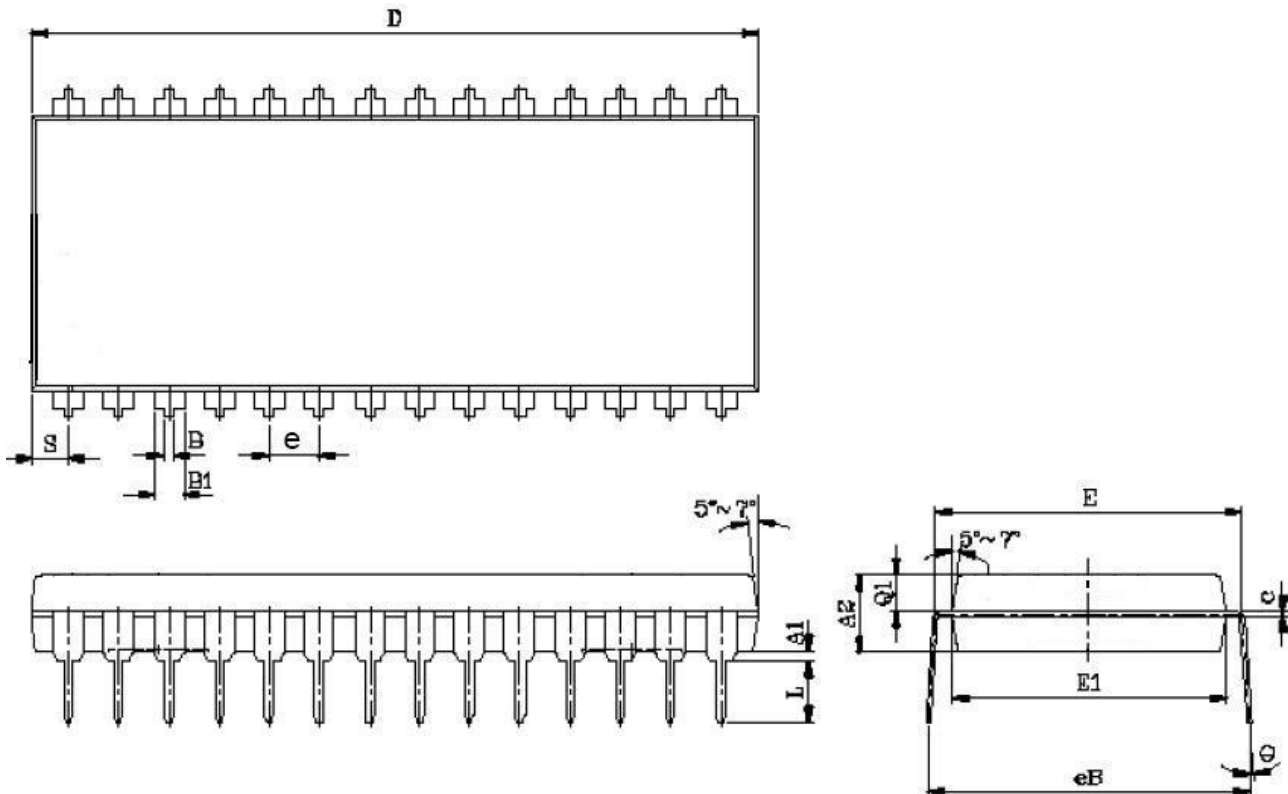

SYM.	UNIT	INCH.(BASE)	MM(REF)
A1		0.015(MIN)	0.381(MIN)
A2		0.155±0.005	3.937±0.127
B		0.020(MAX)	0.508(MAX)
B1		0.060(TYP)	1.524(TYP)
c		0.012(MAX)	0.304(MAX)
D		1.470(MAX)	37.338(MAX)
E		0.6(TYP)	15.24(TYP)
E1		0.55(MAX)	13.970(MAX)
e		0.100(TYP)	2.540(TYP)
eB		0.650±0.020	16.510±0.508
L		0.200(MAX)	5.080(MAX)
S		0.06(MAX)	1.524(MAX)
Q1		0.08(MAX)	2.032(MAX)
Θ		15°(MAX)	15°(MAX)

PACKAGE OUTLINE DIMENSION

28 pin 300 mil PDIP Package Outline Dimension

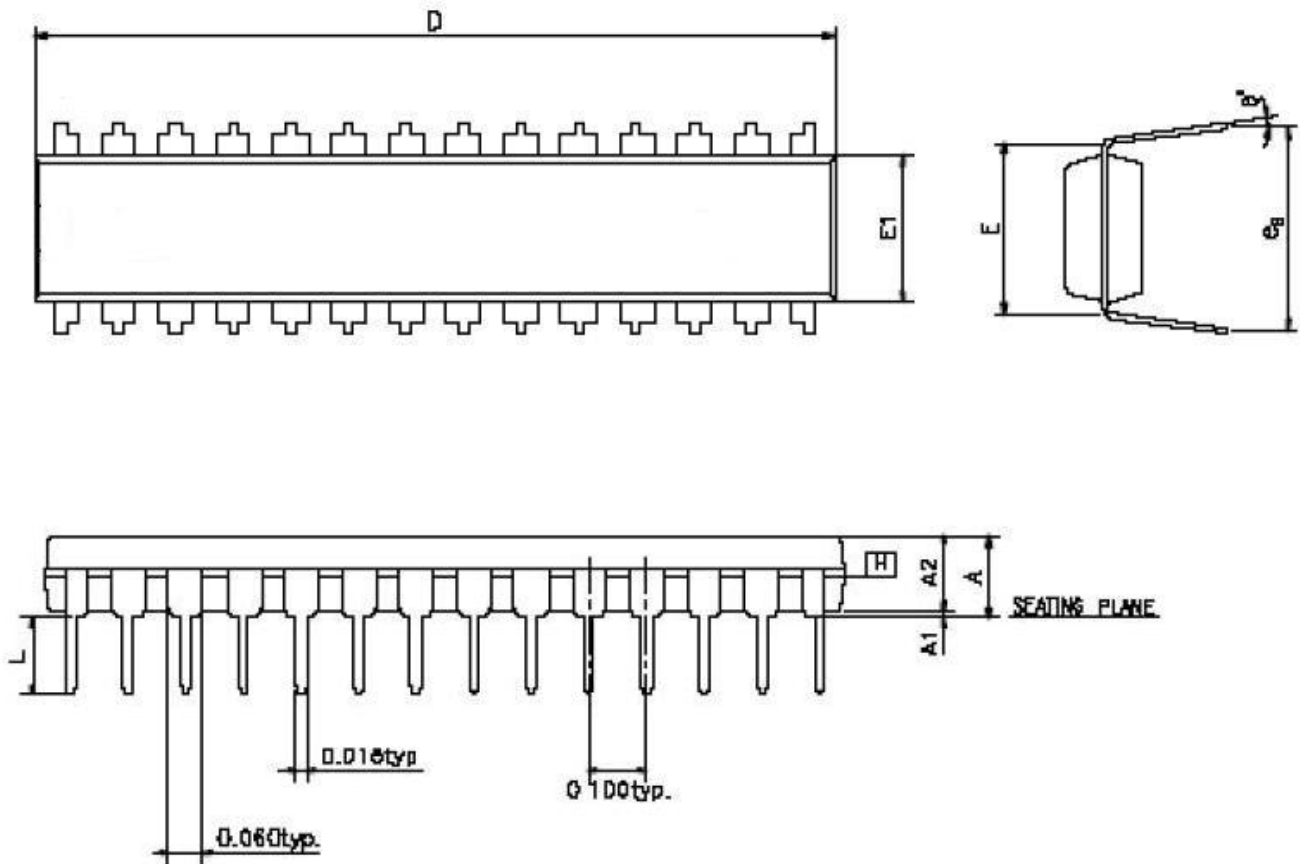

SYMBOLS	MIN.	NOR.	MAX.
A	—	—	0.210
A1	0.015	—	—
A2	0.125	0.130	0.135
D	1.385	1.390	1.400
E	0.310 BSC		
E1	0.283	0.288	0.293
L	0.115	0.130	0.150
ϕ_B	0.330	0.350	0.370
θ°	0	7	15

UNIT : INCH

NOTE:

1. JEDEC OUTLINE : MS-D15 AH



ORDERING INFORMATION

[Production Status: M/P]

Package Type	Access Time (Speed)(ns)	Power Type	Temperature Range(°C)	Packing Type	Lyontek Item No.
28-pin 600mil PDIP	55	Ultra Low Power	0°C~70°C	Tube	LY6264PL-55LL
			-20°C~80°C	Tube	LY6264PL-55LLE
			-40°C~85°C	Tube	LY6264PL-55LLI
		Special Ultra Low Power	0°C~70°C	Tube	LY6264PL-55SL
			-20°C~80°C	Tube	LY6264PL-55SLE
			-40°C~85°C	Tube	LY6264PL-55SLI
	70	Ultra Low Power	0°C~70°C	Tube	LY6264PL-70LL
			-20°C~80°C	Tube	LY6264PL-70LLE
			-40°C~85°C	Tube	LY6264PL-70LLI
		Special Ultra Low Power	0°C~70°C	Tube	LY6264PL-70SL
			-20°C~80°C	Tube	LY6264PL-70SLE
			-40°C~85°C	Tube	LY6264PL-70SLI



ORDERING INFORMATION

[Production Status: M/P]

Package Type	Access Time (Speed)(ns)	Power Type	Temperature Range(°C)	Packing Type	Lyontek Item No.
28-pin 300 mil Skinny PDIP	55	Ultra Low Power	0°C~70°C	Tube	LY6264DL-55LL
			-20°C~80°C	Tube	LY6264DL-55LLE
			-40°C~85°C	Tube	LY6264DL-55LLI
		Special Ultra Low Power	0°C~70°C	Tube	LY6264DL-55SL
			-20°C~80°C	Tube	LY6264DL-55SLE
			-40°C~85°C	Tube	LY6264DL-55SLI
	70	Ultra Low Power	0°C~70°C	Tube	LY6264DL-70LL
			-20°C~80°C	Tube	LY6264DL-70LLE
			-40°C~85°C	Tube	LY6264DL-70LLI
		Special Ultra Low Power	0°C~70°C	Tube	LY6264DL-70SL
			-20°C~80°C	Tube	LY6264DL-70SLE
			-40°C~85°C	Tube	LY6264DL-70SLI



ORDERING INFORMATION

[Production Status: **EOL**]

Package Type	Access Time (Speed)(ns)	Power Type	Temperature Range(°C)	Packing Type	Lyontek Item	Substitute Lyontek Item
28-pin 330mil SOP	35	Ultra Low Power	0°C~70°C	Tube	LY6264SL-35LL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35LLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-35LLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35LLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-35LLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35LLIT	LY6264BSL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tube	LY6264SL-35SL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35SLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-35SLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35SLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-35SLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-35SLIT	LY6264BSL-45LLIT
	55	Ultra Low Power	0°C~70°C	Tube	LY6264SL-55LL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55LLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-55LLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55LLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-55LLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55LLIT	LY6264BSL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tube	LY6264SL-55SL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55SLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-55SLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55SLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-55SLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-55SLIT	LY6264BSL-45LLIT
	70	Ultra Low Power	0°C~70°C	Tube	LY6264SL-70LL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70LLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-70LLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70LLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-70LLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70LLIT	LY6264BSL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tube	LY6264SL-70SL	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70SLT	LY6264BSL-45LLIT
			-20°C~80°C	Tube	LY6264SL-70SLE	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70SLET	LY6264BSL-45LLIT
			-40°C~85°C	Tube	LY6264SL-70SLI	LY6264BSL-45LLI
				Tape Reel	LY6264SL-70SLIT	LY6264BSL-45LLIT



ORDERING INFORMATION

[Production Status: **EOL**]

Package Type	Access Time (Speed)(ns)	Power Type	Temperature Range(°C)	Packing Type	Lyontek Item No.	Substitute Lyontek Item
28-pin 8mmx13.4mm sTSOP	35	Ultra Low Power	0°C~70°C	Tray	LY6264RL-35LL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35LLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-35LLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35LLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-35LLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35LLIT	LY6264BRL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tray	LY6264RL-35SL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35SLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-35SLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35SLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-35SLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-35SLIT	LY6264BRL-45LLIT
	55	Ultra Low Power	0°C~70°C	Tray	LY6264RL-55LL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55LLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-55LLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55LLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-55LLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55LLIT	LY6264BRL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tray	LY6264RL-55SL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55SLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-55SLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55SLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-55SLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-55SLIT	LY6264BRL-45LLIT
	70	Ultra Low Power	0°C~70°C	Tray	LY6264RL-70LL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70LLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-70LLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70LLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-70LLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70LLIT	LY6264BRL-45LLIT
		Special Ultra Low Power	0°C~70°C	Tray	LY6264RL-70SL	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70SLT	LY6264BRL-45LLIT
			-20°C~80°C	Tray	LY6264RL-70SLE	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70SLET	LY6264BRL-45LLIT
			-40°C~85°C	Tray	LY6264RL-70SLI	LY6264BRL-45LLI
				Tape Reel	LY6264RL-70SLIT	LY6264BRL-45LLIT



THIS PAGE IS LEFT BLANK INTENTIONALLY.